

PRYME SPM-2300 / SPM-2300-BF 2-Wire Surveillance Kit 2-Wire PTT

2-WIRE SPM-2300 Series Surveillance Style, Lapel Mic Kit with Noise Reduction Mic on separate 36" cable (allowing Mic & PTT to be conveniently and discreetly located.)

The SPM-2300 Series a 2-wire style surveillance kit with a clear acoustic tube earphone. The SPM-2300 features a lapel-style microphone with a stealth clothing clip that can either be secured to the user's clothes or dropped down a shirt sleeve. The earphone features PRYME's TWIST CONNECT locking mechanism, which makes it easy to replace or remove the earphone.



PRICING

CONNECTOR	MSRP
Simple Pin (1 & 2 pin)	\$64
Multi Pin	\$87

FEATURES


- Rugged lapel mic with surveillance style acoustic tube earphone
- TWIST CONNECT acoustic tube assembly for hygiene and multiple users
- Reinforced earphone clip provides cable retention and eliminates strain on earphone
- Mic housing uses high quality transmit capability
- Covert PTT clip attaches to lapel or sleeve
- Also available with Braided Fiber cloth cable



The SPM-2300-BF™ series products feature our custom made Braided Fiber cable for superior bending and pulling strength. We are so confident in the quality of our cable, that we will replace it for free if it ever breaks.


The SPM-2300-BF has all the features of our popular SPM-2300 - easy-to-use PTT button, Twist Connect clear tube, loud speaker, included semi-custom ear mold, but made with our new BF cable.

Now you have two choices! Traditional PU coiled cable or new Braided Fiber cable for the same price.

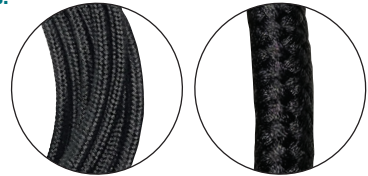

ADVANTAGES OF BRAIDED FIBER CLOTH

- Good for pulling and bending • Soft / comfortable • Resists tangling • Non-reflective • Waterproof

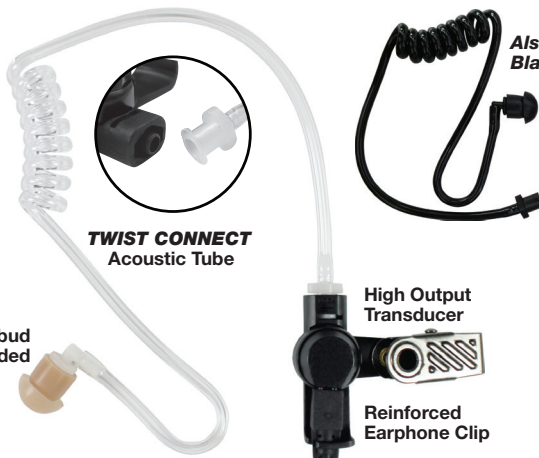


Also available with Black Tube Kit

Noise reduction mic element


Easy to use PTT switch



Metal Clothing Clip




INCLUDES



(1) Open Ear Insert (See parts page 42)

High Noise Environment? Add OPTIONAL P-NAP kit Page 43 - \$5 MSRP



UPGRADE QD™
QUICK DISCONNECT AVAILABLE
See pages 40-41

