

BT-MOBILE HANDSFREE KIT Bluetooth Adapters for Mobile Two-Way Radios


The PRYMEBLU® BT-MOBILE Adapter allows you to use a compatible wireless Bluetooth headset or other audio accessory with a MOBILE 2-way radio. The adapter plugs into and gets its power from the radio. The adapter's replaceable interface cable plugs directly into the microphone jack or rear accessory port of your mobile two-way radio. The BT-MOBILE works with thousands of off-the-shelf consumer Bluetooth headsets (not included).

FEATURES

- Allows you to use a Bluetooth headset to send and receive calls over your mobile two-way radio
- Compatible with thousands of readily available Bluetooth headsets (not included)
- Compatible with a wide range of different mobile radios; simply choose the correct model adapter for your radio
- Easy pairing process. Stores paired connection to the wireless headset even if the radio is powered off or adapter is removed from the 2-way radio
- No time delay on Transmit Audio messages

Multiple PTT Options

Activate your radio's transmit function by pressing the Multifunction/PTT button on the adapter itself. Or use the optional foot switch PTT or wireless mini PTT buttons (sold separately).

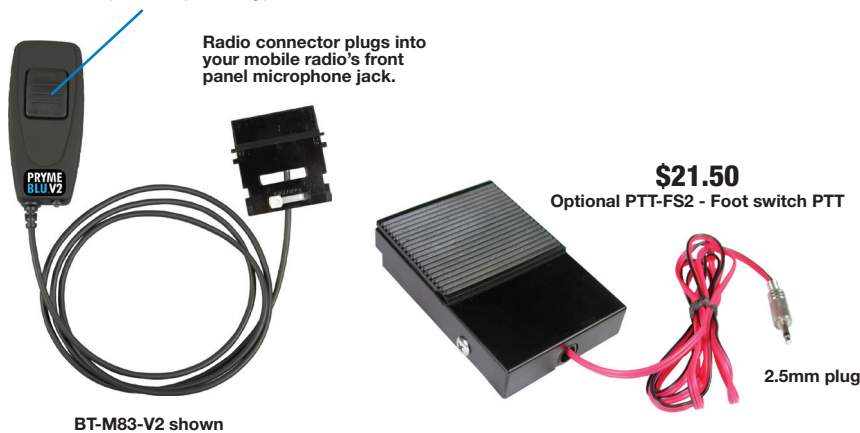

WIRED AND WIRELESS REMOTE PTT OPTIONS FOR PRYMEBLU® ADAPTERS

BT-PTT-Z (mini)
Wireless Wireless PTT works with V2 Adapters



BT-PTT-ZU SUPER MINI (FOB/RING/STRAP)
Wireless PTT works with V2 Adapters



PTT-5 - with QD plug
Remote Wired PTT Switch ONLY



MODEL	RADIO MANUF	RADIO MODELS	CONNECTION
BT-M00J-V2	Icom	IC-F110, IC-F110S, IC-F111, IC-F111S, IC-F121, IC-F121S, IC-F1610, IC-F1710, IC-F1721, IC-F1721D, IC-F1810, IC-F1821, IC-F1821D, IC-F210, IC-F210S, IC-F211, IC-F211S, IC-F221, IC-F221S, IC-F2610, IC-F2710, IC-F2721, IC-F2721D, IC-F2810, IC-F2821, IC-F2821D, IC-F320, IC-F320S, IC-F410S, IC-F420, IC-F420S, IC-F5011, IC-F5021, IC-F5022, IC-F5061, IC-F5062, IC-F510, IC-F5121D, IC-F521, IC-F6011, IC-F6021, IC-F6022, IC-F6061, IC-F6062, IC-F610, IC-F6121D, IC-F621, IC-F621TR, IC-F9511, IC-F9521, IC-F5220, IC-F6220, IC-F5360, IC-F6360	Uses both RJ45 (Mic Jack) plus rear speaker jack ¹
BT-M01J-V2	Kenwood	TM-271, TK-762, TK-862, TK-7160, TK-8160, TK-7162, TK-8162, TK-7180, TK-8180, TK-7189, TK-8189, TKR-750, TKR-850, TK-768G, TK-868G, TK-760, TK-860, TK-780, TK-880, TK-7102, TK-8102, TK-6110, TK-7302, TK-7360, TK-8302, TK-8360, NX-720, NX-740, NX-840, NX-920	Uses both RJ45 (Mic Jack) plus rear speaker jack ¹
	Hytera	TM-600, TM-610, TM-628H	
BT-M31-V2	Kenwood	TK-7180, TK-8180, TK-7189, TK-8189, NX-700, NX-800, NX-900, NX-901, TK-5720, TK-5820	Uses DB25 rear accessory connector
BT-M33-V2	Motorola	CDM Series, CM Series, GM Series, GR series, M Series, MAXTRAC Series, PM Series, SM Series	Uses OEM rear accessory connector
BT-M43-V2	Motorola	XTL 1500, XTL 2500, XTL 5000, APX 1500, APX 4500, APX 6500, APX 7500	Uses OEM rear accessory connector
BT-M83-V2	Motorola	XPR 4300, XPR 4350, XPR 4380, XPR 4500, XPR 4550, XPR 4580, XPR 5350, XPR 5550, XPR 8300, XPR 2500, XPR 5380, XPR 5580, XPR 5550e, XPR 5580e, XPR 5350e, XPR 5380e	Uses OEM rear accessory connector
BT-M02-V2	Vertex	EVX-5300, EVX-5400, VX-2100, VX-2200, VX-4100, VX-4200, VX-4500, VX-4600	Uses DB15 rear accessory connector
BT-M02J-V2	Vertex	VX-1400, VX-2100, VX-2200, VX-4100, VX-4200, VX-4500, VX-4600	Uses both RJ45 (Mic Jack) plus rear speaker jack ¹

¹ Note that on these models, the radio's hand microphone must be removed. On other models, the hand microphone can remain plugged into the radio.